

BOLTLESS SHELVING



MECALUX™

METAL POINT SHELVING



You will receive the product packed and protected from any damage during transportation or handling.

Our customer service department is entirely at your disposal.



The quality of the steel used, the state-of-the-art manufacturing systems, and our exclusive system of installing the different elements make METAL POINT® shelving far superior to other shelving systems in the market place.



On day to day utilization, the shelving may be scratched, hit...Metal Point guarantees its conservation with the best finishing, due to the application of epoxy powder paint, with a minimum thickness of 50 to 75 micrones.

Easy to install

A rubber mallet is all you need to put your shelving up. The assembly of all the components is accurate, simple and fast.






The esthetic nature of METAL POINT® shelving allows installation in any place of your business, and may be used as an attractive display for your products. You can easily add more bays or modify its arrangement of levels as needed.



METAL POINT[®]2

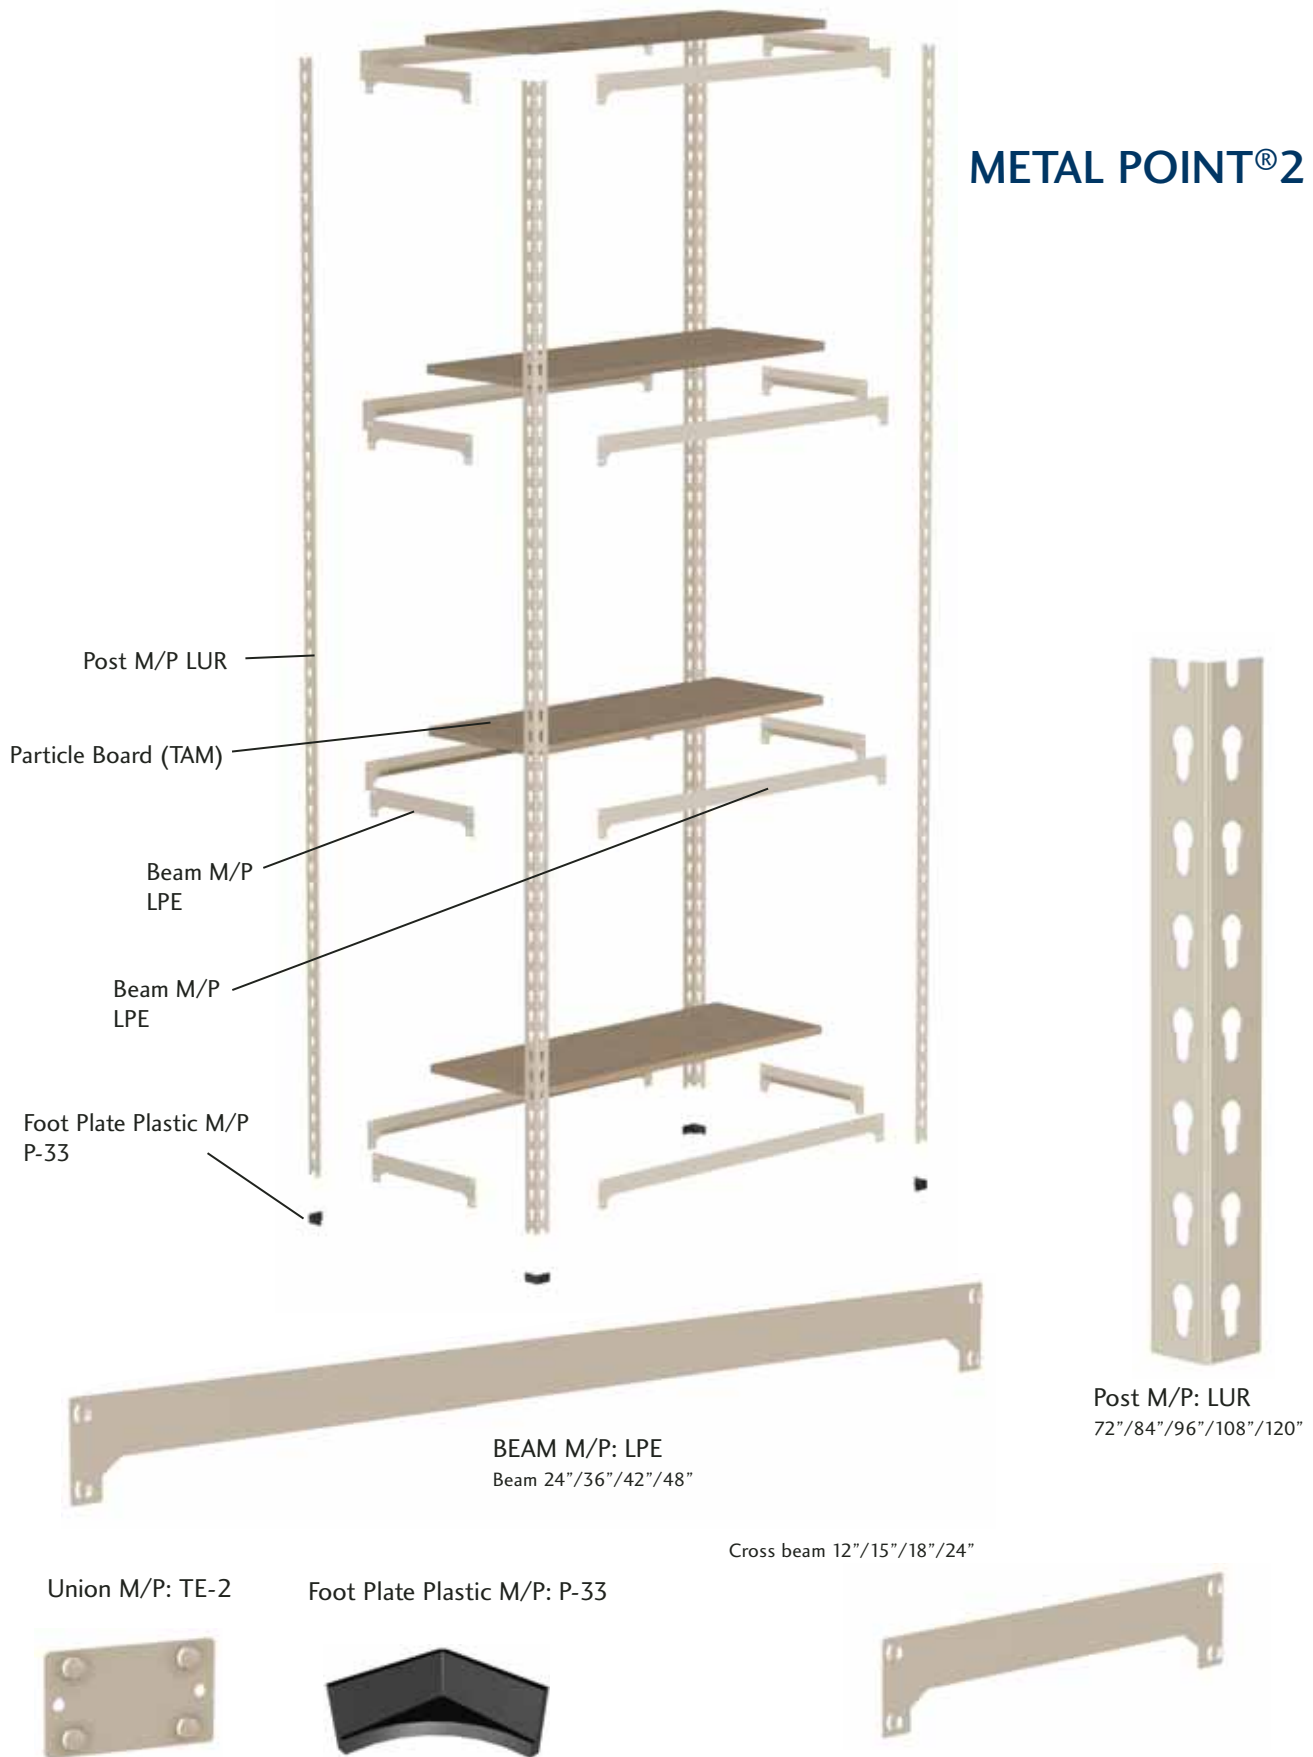



Shelving for medium size loads METAL POINT®2



Loading capacity (Lbs.) per Bay.


Number of levels	Post M/P LUR/84 Loading (Lbs)		Post M/P LUR/96 Loading (Lbs)		Post M/P LUR/120 Loading (Lbs)	
	Per Level	Per Bay	Per Level	Per Bay	Per Level	Per Bay
3	660	1980	440	1320		
4	950	3800	670	2680	460	1840
5	1050	5250	830	4150	580	2900
6	1070	6420	870	5220	690	4140
7			860	6020	750	5250
8			830	6640	750	6000
9					710	6390

Loading (Lbs.) per shelf (UDL).
Shelves with particle board panels 5/8" thickness

DEPTHS	WIDTHS			
	24"	36"	42"	48"
12"	470	340	270	250
15"	550	390	310	280
18"	700	450	350	290
24"	780	490	400	320



METAL POINT® PLUS

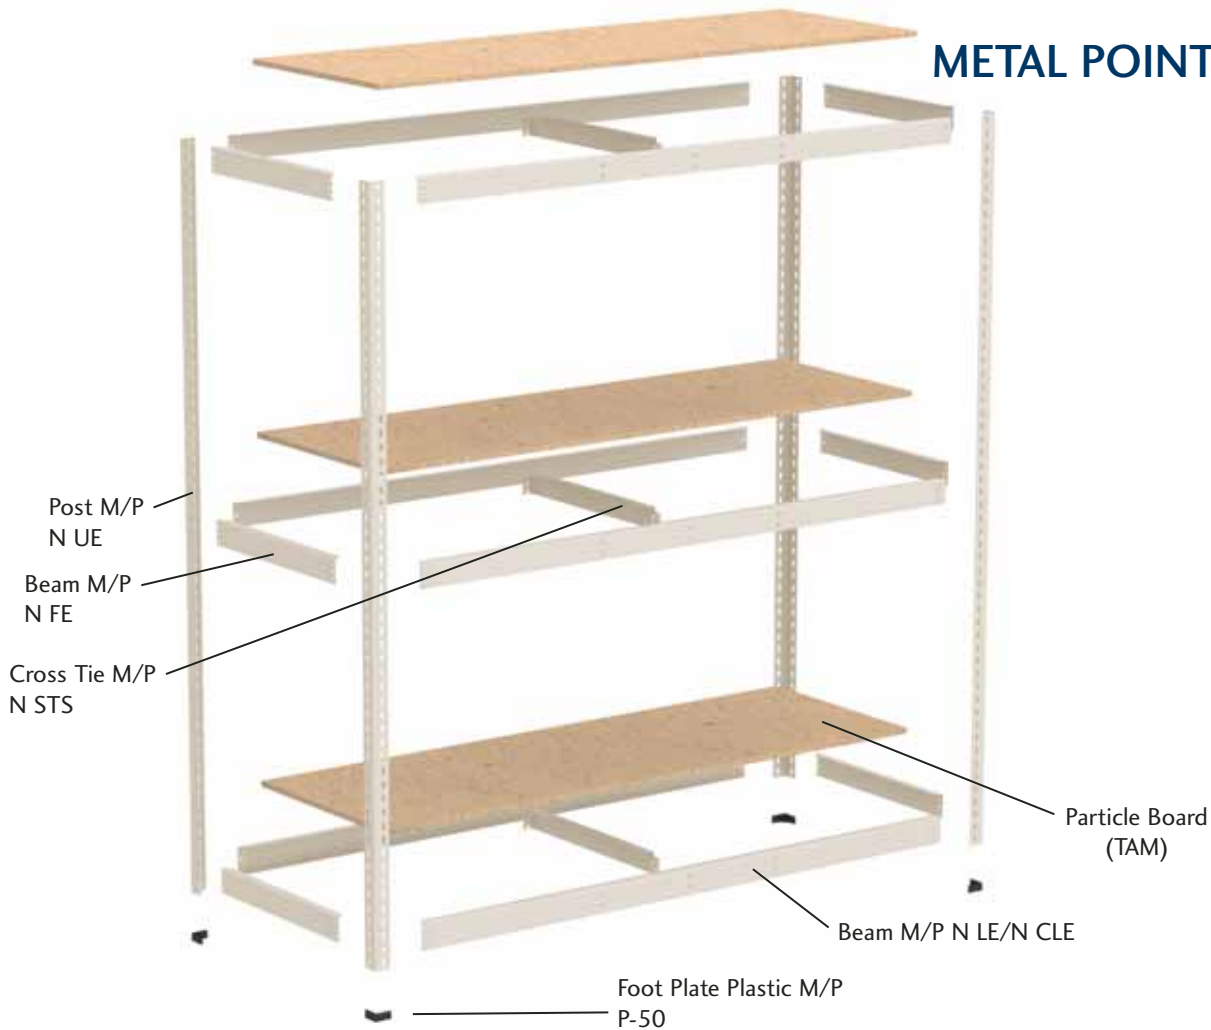



Shelving for large size loads METAL POINT® PLUS

The METAL POINT® shelving can be easily adapted to any utilization that you may require. For your warehouse, your office, your home...any type of load to be stored, there will always be a solution with METAL POINT®.



Loading (Lbs.) per shelf (UDL).
Shelves with particle board panels 5/8" thickness

Loading capacity (Lbs.) per Bay.

Number of levels	Post M/P N UE/84 Loading (Lbs)		Post M/P N UE/96 Loading (Lbs)		Post M/P N UE/120 Loading (Lbs)		Post M/P N UE/144 Loading (Lbs)	
	Per Level	Per Bay	Per Level	Per Bay	Per Level	Per Bay	Per Level	Per Bay
3	2310	6930	2290	6870				
4	2150	8600	2140	8560	1280	5120	1190	4760
5	1870	9350	1850	9250	1210	6050	1120	5600
6	1650	9900	1650	9900	1100	6600	1060	6360
7			1430	10010	1060	7420	990	6930
8			1100	8800	920	7360	900	7200
9					880	7920	860	7740
10							840	8400

		DEPTHS 12" 18" 24"				
		WIDTHS 48" 60" 72" 84" 96"				
Beam M/P N LE	0 N STS	1870	1230	420		
	1 N STS	2420	1940	990	400	250
	2 N STS		2000	1100	750	530
Beam M/P N CLE	0 N STS	2310	1760	1320	880	550
	1 N STS	2530	1980	1340	1320	1200
	2 N STS		2310	1540	1430	1280

		DEPTHS 30" 36" 42" 48"				
		WIDTHS 48" 60" 72" 84" 96"				
Beam M/P N LE	0 N STS	1710	1230	440		
	1 N STS	1810	1410	990	400	250
	2 N STS		1540	1100	750	530
Beam M/P N CLE	0 N STS	1870	1760	1290	830	440
	1 N STS	2030	1810	1590	1370	1100
	2 N STS		2310	1760	1540	1280